

PREPARED BY
HIGHWAY PLANNING SURVEY
IN COOPERATION WITH
U. S. PUBLIC ROADS ADMINISTRATION

STATE OF MINNESOTA
DEPARTMENT OF HIGHWAYS
ROAD LIFE STUDIES
CONSTRUCTION PROJECT LOG RECORD


CONTROL SECTION 0110
TRUNK HIGHWAY 65
COUNTY Aitkin
DISTRICT 1A

LIMITS: Soo Line R.R. Under pass - Jct. T.H. 27



SCALE: 1" = 1/2 MI.

YEAR BUILT	PROJECT N°	DESCRIPTION			CODE N°
		TYPE	WIDTH	THICKNESS	
		Earth	26'		No Record of Constr
		Br. M781, 2799	18'		14', 26'
		M782, M784 & M785	18'		15', 16' & 30' O.S.
1928		Gravel	26'	2"	Gravelling done over period of years by Maint. Dept.
		Grading	38'		
1937	65-5-40-2A	Stab. Gravel Br. 3455 & 4-Culya	37'	6"	(1)
1937	65-5-40-2B	Mono. Culverts Br. 5253 & B318			W88DY70; W84X64. W106X75; W106X42.
1938	0110-01	Mixed Bitum.	26'	1 1/2"	
1939	0110-02	Stab. Gravel Mixed Bitum.	37'	4"	
1939	0110-03	Seeding			Maint. Dept.
1939	0111-03	Ext. Mono. Culvert			W64
1939	0111-04	Grading	36'		
1939	0111-05	Gravel	36'	1 1/2"	
M	1940 A.F.E. 25	Bit. Retreat & Base Repair			SC 3,12792 Gal./Mi. Agg. 4000 C.Y./Mi. Maint. Dept.
C	1941 0110-06	Bit. Surf. Treat. Stab. Grav. Base	26'	3/4"	
M	1942 A.F.E. 5	Fog Seal	24'		RG3 & AE-1, 2023 G./Mi. Agg. 55 C.Y./Mi. Maint. Dept.
M	1944 A.F.E. 4	Spot Treat. Bit. Surf. Repair			MC 2, 1487 Gal./Mi. Grav. 91 C.Y./Mi. Maint. Div.
M	1945 A.F.E. 4	Spot Treat. Bit. Surf. Repair			MC 2, 913 Gal./Mi. Grav. 14 C.Y./Mi. Maint. Div.
M	1946 A.F.E. 4	Spot Treat. Bit. Surf. Repair	26'		MC 2, 8067 Gal. Agg. 442 C.Y.

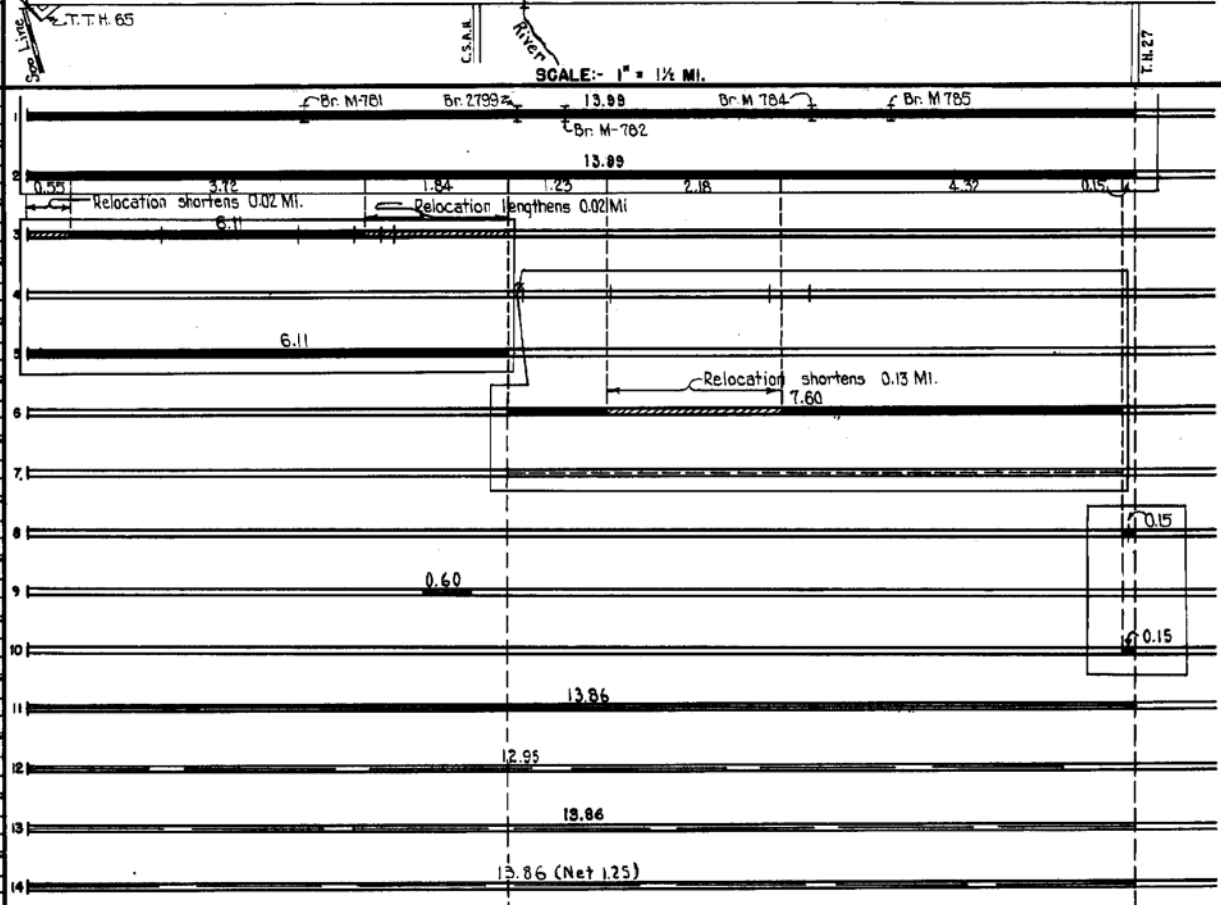

YEARS FROM	TO	TOTAL MILES	UNINCORPORATED		INCORPORATED		RURAL		URBAN		
			RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.	RDWY. MI.	BR. MI.	
1821	1938	13.98	13.98	0.01	0.00	0.00	0.00	13.98	0.01	0.00	0.00
1939	1940	13.86	13.86	0.00	0.00	0.00	0.00	13.86	0.00	0.00	0.00
1941		13.88	13.88	0.00	0.00	0.00	0.00	13.88	0.00	0.00	0.00

REMARKS: Layout is to scale as of 1921


- (1) W46X53, W104X68, W46X43, W46146, W46X43.
- (2) See C.S. 0109 for Br. 5766.

PREPARED BY
HIGHWAY PLANNING SURVEY
IN COOPERATION WITH
U. S. PUBLIC ROADS ADMINISTRATION

STATE OF MINNESOTA
DEPARTMENT OF HIGHWAYS
ROAD LIFE STUDIES
CONSTRUCTION PROJECT LOG RECORD

CONTROL SECTION 0110
TRUNK HIGHWAY 65
COUNTY Atkin
DISTRICT 1A

LIMITS Sop Line R.R. Underpass - Jct. T.H. 27

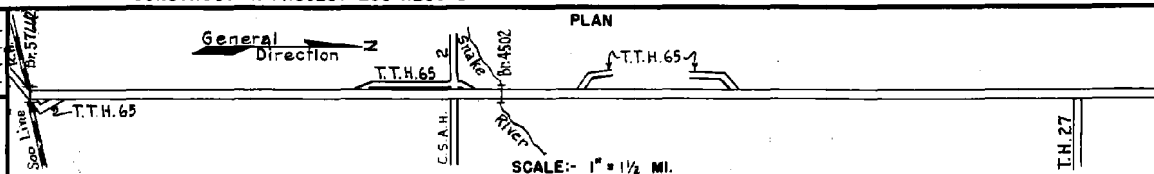

YEAR BUILT	PROJECT N°	DESCRIPTION			CODE N°	TH. 27
		TYPE	WIDTH	THICKNESS		
M 1947	A.F.E. 4	Spot Treat. Bit. Surf. Repair	24'		MC-2, 19610 Gal. Agg. 1021 C.Y.	13.86 (Net 2.50)
C 1948	A.F.E. 20	Bit. Resurfacing Mixed Bit.	24'	1" added	MC-3, 57942 Gal. Agg. 4291 Tons	6.11
M 1948	A.F.E. 4	Spot Treat. Bit. Surf. Repair	26'		MC-2, 8205 Gal. Agg. 480 C.Y.	7.75 (Net 1.20)
C 1949	A.F.E. 20	Bit. Resurfacing Mixed Bit.	24'	1" added	MC-3, 66876 Gal. Agg. 3692 C.Y.	7.75 1.39
M 1950	A.F.E. 4	Bit Seal Coat	24'		RC-1, 19190 Gal. Agg. 211 C.Y.	13.86
M 1952	A.F.E. 4	Spot Treat. Bit. Surf. Repair	24'		MC-2, 10689 Gal. Agg. 644 C.Y.	13.86 (Net 1.29)
M 1953	A.F.E. 604	Spot Treat. Bit. Surf. Repair			MC-2, 4480 Gal. Agg. 325 Tons	5.50 (Net 0.50)
M 1954	A.F.E. 821	Spot Treat. Bit. Surf. Repair Spot Base Repair	24'		MC-2, 16120 Gal. Agg. 1257 Tons	13.86 (Net 1.75)
M 1955	A.F.E. 604	Spot Treat. Bit. Surf. Repair	24'		MC-2, 27964 Gal. Agg. 2038 Tons	13.86 (Net 3.85)
M 1956	A.F.E. 604	Spot Treat. Bit. Surf. Repair	24'		MC-2, 19267 Gal. Agg. 1624 Tons	13.86 (Net 2.15)
M 1957	A.F.E. 604	Spot Treat. Bit. Surf. Repair	24'		MC-2, 12606 Gal. Agg. 1002 Tons	13.86 (Net 1.35)
M 1958	A.F.E. 604	Spot Treat. Bit. Surf. Repair	24'		MC-2, 15443 Gal. Agg. 1294 Tons	13.86 (Net 1.90)
M 1959	A.F.E. 604	Spot Treat. Bit. Surf. Repair	24'	1"	MC-2, 7964 Gal. Agg. 683 Tons	5.40 (Net 1.00)
C 1961	0110-13	Extend Br. 4502 Grading & Gravel Base Road Mix Bit. (Base)	42' 2 1/2'		Now a 1988T on 3" Sand Gravel Sub-Base	Lengthens 002 6.49

YEARS FROM	TOTAL MILES	UNINCORPORATED		INCORPORATED		RURAL		URBAN		REMARKS: See Sheet NR 1
		ROWY. MI.	BR. MI.	ROWY. MI.	BR. MI.	ROWY. MI.	BR. MI.	ROWY. MI.	BR. MI.	

